SCST

**HDMI Extender Series** 

# User Manual

Model: HEOIC

HDMI over Coaxial Extender 1080p 100M




## Introduction

HE01C is an HDMI extender that can use a coaxial cable to send HDMI signal with a transmission distance of up to 100M. Its RX unit has a BNC loop-out port to daisy chain for HDMI distribution and extension. For each RX added, you can have one additional HDMI output.

#### Features

- Resolution up to 1080p.
- Signal extension up to 100M over coaxial cable.
- Built-in BNC loop-out port for daisy chain to have multiple remote HDMI displays.

#### **Installation View**

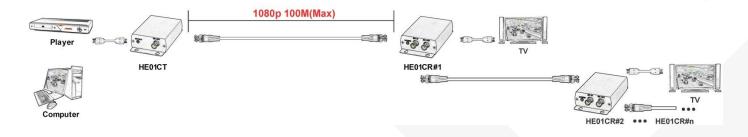

## Cable

To send HD video must use coaxial cable with Bandwidth at least 1.5G, to send Full HD video must use coaxial cable with bandwidth at least 3G.

Link cable recommend to use high quality 75Ω Coaxial Cable & BNC connector, to use low quality coaxial cable may case signal loss and effect transmission distance and reliability.

## **Working Distance**

Max. distance via high quality 75Ω Coaxial Cable ( Belden 1505A Testing)		
SD (480i,576i resolution) (270Mbps)	300M	
HD (720p, 1080i, 1080p@24/25/30Hz resolution) (1.45Gbps)	200M	
Full HD (1080p@50/60Hz) resolution (2.97Gbps)	100M	


## **LED Indication**

## HE01CT


Power & Signal
Power on
Not support HDMI input format
SDI signal
SDI signal output
Power
SDI signal lock

## **Panel View**

HE01CT

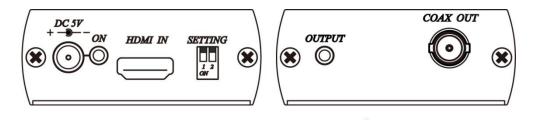

HE01CR



## **HE01CT Switch Instruction**

1	· · · · · · · · · · · · · · · · · · ·	Video Support: 480i, 576i, 720p@50/59.94/60Hz, Max resolution 1080i@50/59.94/60Hz.	
		t: 480i, 576i, 720p@50/59.94/60Hz, 1080i@50/59.94/60Hz, on 1080p@23.98/24/29.97/30/50/59.94/60Hz.	
2	· · · ·	ort LPCM 2 Channels. rt LPCM 7.1 Channels.	

## Specification

ITEM NO.	HE01CT	HE01CR			
Support					
Max. HDMI Resolution	1080p@60Hz				
Max. SDI Resolution	3G-SDI				
Max. Transmission Distance	100M over 1.5G/ 3G Coaxial Cable or Greater				
Audio Format	LPCM 7.1 Channels, 48kHz, 16 / 20 / 24Bit				
Ports & Interfaces					
Video Input	1 x HDMI Type A	1 x 75Ω BNC			
Video Output	1 x 75Ω BNC	1 x HDMI Type A, 1 x 75Ω BNC			
Power					
Power Supply	DC 5V 2A	DC 5V 2A			
Power Consumption	850mA 750mA				
Ambient Temperature					
Operation	0 to 55℃				
Storage	-20 to 85℃				
Humidity	up to 95%				
Physical Characteristics					
Dimensions	67 x 110 x 27mm	67 x 110 x 27mm			
Weight	200g 200g				